

Features & Benefits

Recessed downlight for compact fluorescent lamps in horizontal mode. High reflectance vacuum metallisation aluminium faceted reflector. High luminous efficiency. Single and twin lamp selection availability. Reflector made of aluminium 90% polished. Compact 840 fluorescent lamps included.


Application

Suitable for commercial building, offices, conference rooms, classrooms, shops, etc.

Electrical



Control Gear	Philips/Osram/Tridonic
Light Source	PHILIPS PLC 18W/840/2P
Wattage	49W
Lumen Output	1632lm
CRI	80
LER	33
CCT	2700K/3000K/4000K/5000K

Photometric

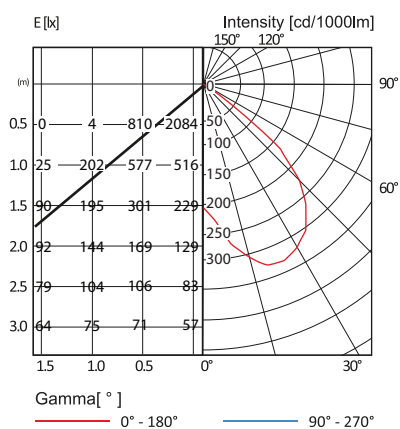

Mechanical

Construction	Made of cold rolled steel
Diffuser	-



Ordering Data

MODEL NO.	NO. OF LAMP	MODEL NO.	NO. OF LAMP
6" (Ø152) H100 RIM Ø 189(MM)		8" (Ø195) H148 RIM Ø 230(MM)	
PLUTO103.6213E	2X13W	PLUTO103.8213E	2X13W
PLUTO103.6218E	2X18W	PLUTO103.8218E	2X18W
PLUTO103.6226E	2X26W	PLUTO103.8226E	2X26W

Options