




Features & Benefits

Die cast aluminum shell coated with an epoxy polyester powder which creates high resistance to atmospheric agents and corrosion. Wide beam symmetric light distribution reflectors. Tempered glass protective screen in drop down frame with stainless steel fasteners. Hermetic belt of heat resisting silicone. Easy installation and electrical connection.

Photometric

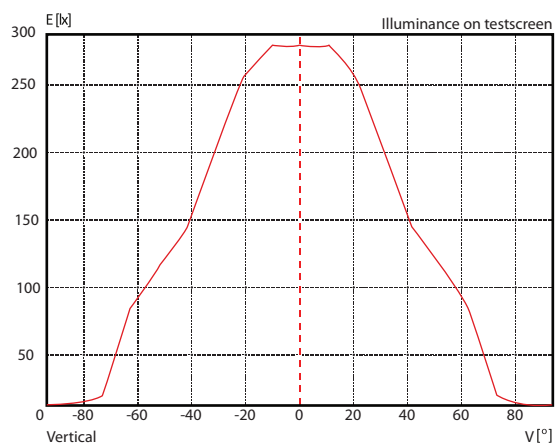

Options

Application

Suitable for floodlighting of buildings, advertising boards, parks.

Electrical

Control Gear Light Source

Philips

Metal Halide/High Pressure Sodium

Wattage

374W

Lumen Output

33342lm

CRI

20

LER

89




CCT

2000K

Mechanical

Construction Lens

Made from injected die-cast aluminium
Temper glass



Ordering Data

MODEL NO.	NO. OF LAMP
NEPTUNE 200.250MH	1 X 250W
NEPTUNE 200.400MH	1 X 400W
NEPTUNE 200.150SON	1 X 150W
NEPTUNE 200.250SON	1 X 250W
NEPTUNE 200.400SON	1 X 400W