



Features & Benefits

Lift or tilt, wishbone spring, rocket bolt or spring clip installations. Wide choice of optics ensure optimum performance or any situations ideal for areas where VDU's are used.

Application


Ideal for offices, schools, libraries, government building, commercial building where VDU Terminal are frequently used.

Electrical


| | |
|---------------------|------------------------------------|
| Control Gear | Philips/Osram/Tridonic |
| Light Source | Fluorescent T5 lamp of 14W/28W/35W |
| Wattage | 54W |
| Lumen Output | 1721lm |
| CRI | 80 |
| LER | 32 |
| CCT | 4000K/6500K |

Mechanical

| | |
|---------------------|--|
| Construction | Made of cold rolled sheet |
| Louvre | High quality anodised aluminium, double parabolic louvre |



Photometric

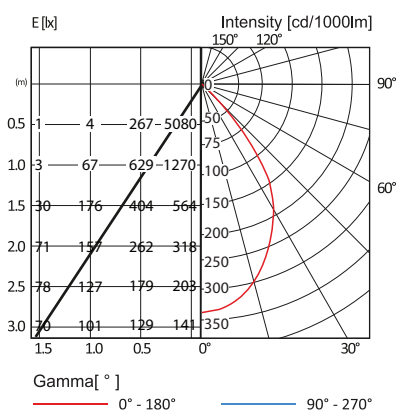

Options

- Specular anodised aluminium
- Semi specular anodised aluminium

Ordering Data

| MODEL NO. | NO. OF LAMP | L(mm) | L1(mm) | W(MM) | W1(MM) | H(MM) | H1(MM) |
|----------------------------|-------------|-------|--------|-------|--------|-------|--------|
| PAC 314 VDU (Solid Infill) | 3X14W | 571 | 595 | 571 | 595 | 80 | - |