




Features & Benefits

Designed for air delivery or air supply circulation and recess mounting with parabolic mirror optic louvre. Fully compliant with light distribution requirement of CIBSE LG3 Category 2 and EMC Standard (EN61000-3-2:2000, EN61000-3-3:2000 & CISPR15:2000).

Photometric

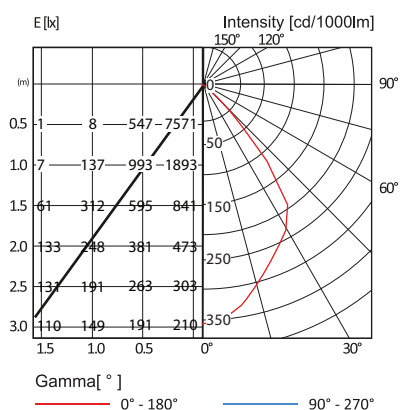

Application


Mainly used for general lighting in offices, and shops.

Electrical

Control Gear	Philips/Osram/Tridonic
Light Source	Fluorescent T5 lamp of 14W/28W/35W
Wattage	62W
Lumen Output	2878lm
CRI	80
LER	46
CCT	4000K/6500K

Mechanical

Construction	Made of cold rolled sheet
Louvre	High quality anodised aluminium, double parabolic louvre



Ordering Data

MODEL NO.	NO. OF LAMP	L(mm)	L1(mm)	W(MM)	W1(MM)	H(MM)	H1(MM)
PAC 214 VDU AH	2X14W	569	595	176	295	70	-
PAC 228 VDU AH	2X28W	1170	1195	176	295	70	-

Options

- Specular anodised aluminium
- Semi specular anodised aluminium