




Features & Benefits

Suitable for ceiling, wall or pendant mounting. Heavy gauge galvanized steel epoxy coated wire guard. Cover plate held securely by threaded nut for fast installation. New plastic snap-on end caps for easy installation of wire guard. High quality white epoxy powder coated finish. Large terminal block for ease in installation. Complete with Triphosphor lamp(s).

Photometric

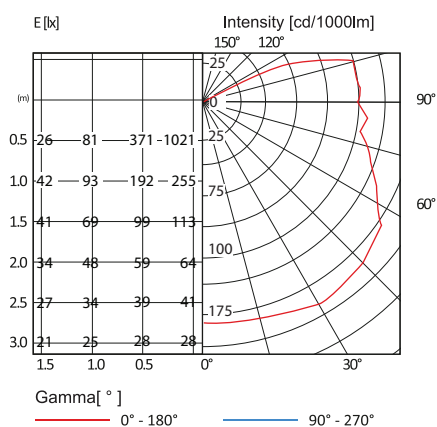

Options

Application

Ideal for most applications.

Electrical

Control Gear Light Source

Philips/Osram/Tridonic
Fluorescent T8 lamp of 18W/36W/58W

Wattage

21W

Lumen Output

1361lm

CRI

80

LER

65


CCT

4000K/6500K

Mechanical

Construction Guard

Made of cold rolled sheet
Wire net



Ordering Data

MODEL NO.	NO. OF LAMP	L(mm)	L1(mm)	W(MM)	W1(MM)	H(MM)	H1(MM)
PWGW 118	1X18W	614	624	115	120	46	108
PWGW 136	1X36W	1224	1234	115	120	46	108
PWGW 218	2X18W	614	624	115	120	46	108
PWGW 236	2X36W	1224	1234	115	120	46	108
PWGW 158	1X58W	1525	1535	115	120	46	108
PWGW 258	2X58W	1525	1535	115	120	46	108