



Features & Benefits

Suitable for ceiling, wall or pendant mounting. AA12 acrylic diffuser for visual comfort. Cover plate held securely by threaded nut for fast installation. New plastic snap-on end caps for easy installation of diffuser.

Application

Ideal for most application in commercial, industrial and domestic areas.



Electrical

| | |
|---------------------|------------------------------------|
| Control Gear | Philips/Osram/Tridonic |
| Light Source | Fluorescent T8 lamp of 18W/36W/58W |
| Wattage | 46W |
| Lumen Output | 2039lm |
| CRI | 80 |
| LER | 44 |
| CCT | 4000K/6500K |

Mechanical

| | |
|---------------------|---------------------------|
| Construction | Made of cold rolled sheet |
| Diffuser | AA12 Acrylic |

Photometric

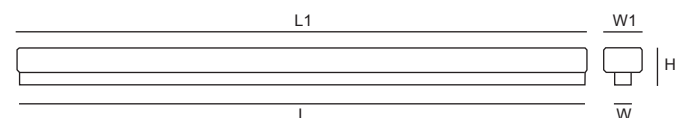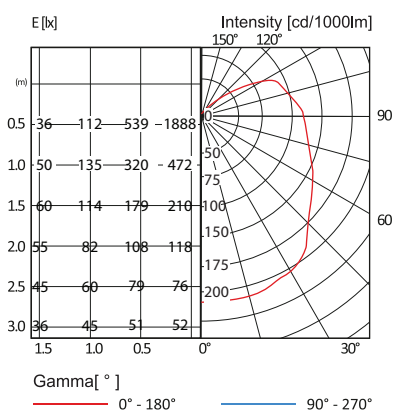

Ordering Data

| MODEL NO. | No.Of Lamp | L(mm) | L1(mm) | W(mm) | W1(mm) | H(mm) |
|-----------|------------|-------|--------|-------|--------|-------|
| PDBN 118H | 1x18W | 614 | 624 | 59 | 69 | 105 |
| PDBN 218H | 2x18W | 614 | 624 | 59 | 120 | 105 |
| PDBN 136H | 1x36W | 1225 | 1235 | 59 | 69 | 105 |
| PDBN 236H | 2x36W | 1225 | 1235 | 59 | 120 | 105 |
| PDBN 158H | 1x58W | 1525 | 1535 | 59 | 69 | 105 |
| PDBN 258H | 2x58W | 1525 | 1535 | 59 | 120 | 105 |

Options