




Features & Benefits

Suitable for ceiling, wall and pendant mounting. Slim Profile – 54mm wide (single / twin lamps). High quality white epoxy powder coated finish. Complete with triphosphor lamps, 4000K – 840 T8. Cover plate held by threaded nut for fast installation. Large terminal block for ease of installation. 25mm cable entry with protective grommet

Photometric

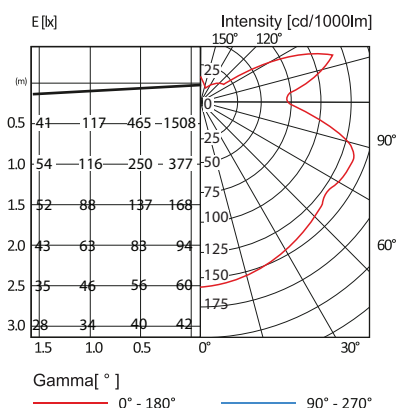

Application


All commercial, industrial and domestic applications

Electrical

Control Gear	Philips/Osram/Tridonic
Light Source	Fluorescent T8 lamp of 18W/36W/58W
Wattage	46W
Lumen Output	2121lm
CRI	80
LER	46
CCT	4000K/6500K

Mechanical

Construction	Made of cold rolled sheet
Diffuser	-

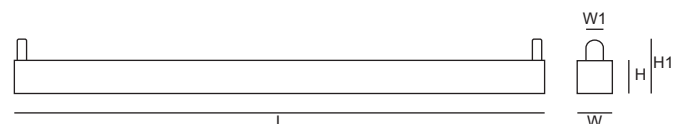

Options

- Electronic Ballast

Ordering Data

MODEL NO.	No.Of Lamp	L(mm)	W(mm)	W1(mm)	H(mm)	H1(mm)
PBBN 118	1X18W	610	54	-	45.5	89.5
PBBN218	2X18W	610	54	103	45.5	89.5
PBBN136	1X36W	1218	54	-	45.5	89.5
PBBN236	2X36W	1218	54	103	45.5	89.5
PBBN158	1X58W	1521	54	-	45.5	89.5
PBBN258	2X58W	1521	54	103	45.5	89.5