


Features & Benefits

Fully compliant with light distribution requirement of CIBSE LG3 Category 2 and EMC Standard (EN61000-3-2:2000, EN61000-3-3:2000 & CISPR 15:2000). Designed for recessed mounting to ceiling with parabolic mirror optic louvre. Louvers manufactured by flexible manufacturing system (FMS) for precise, accuracy and optimized product performance.

Photometric

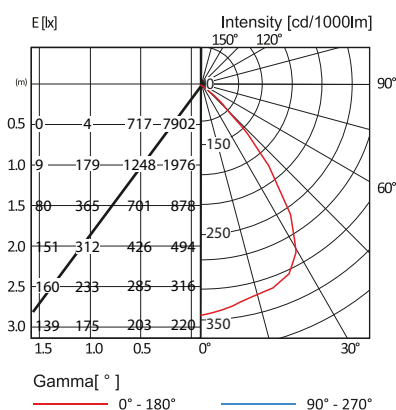

Options

Application


Mainly used for general lighting in offices, supermarkets and complexes.

Electrical

Control Gear	Philips/Osram/Tridonic
Light Source	Fluorescent T8 lamp of 18W/36W/58W
Wattage	76W
Lumen Output	3372lm
CRI	80
LER	44
CCT	2700K/3000K/4000K/6500K

Mechanical

Construction	Made of cold rolled sheet
Louver	High quality aluminium



Ordering Data

MODEL NO.	NO. OF LAMP	L(mm)	L1(mm)	W(MM)	W1(MM)	H(MM)	H1(MM)
PAC 218 MM VDU CAT2 1x2	2X18W	595	612	295	-	100	-
PAC 236 MM VDU CAT2 1x4	2X36W	1195	1222	295	-	100	-