




Description

Suspended elliptical LED extrusion, complete with ULB louvre.

Application

Offices, education facilities, commercial & hospitals.

Photometric

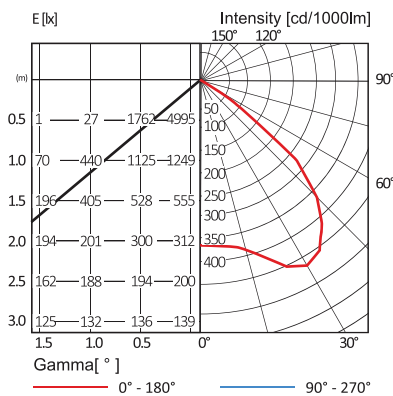

IES file No: SJ4616


Electrical

Control Gear	Tridonic
Light Source	Linear LED Strip
Wattage	39W
Lumen Output	>3400lm
CRI	80
LER	87
CCT	4000K
SDCM	<4
L70	50,000hrs

Mechanical

Construction	Extruded aluminium
Louvre	High Quality Anodised Aluminium
Diffuser	Frosted U Shape

Dimension



Options

- Natural Anodized
- Epoxy Powder Coat
- Dimming
- Cyanosis
- Custom Fittings
- Emergency
- T5
- Linear Prismatic Diffuser
- Rod or Suspension
- 3000K/6500K

Ordering Data

MODEL NO.	Dimension (LxWxH)(mm)	Light Source Model	Nominal System Power (W)	Nominal System Lumen Output (lm)	Nominal System Efficacy (lm/W)
PEC A5	568x160x70	Tridonic	12	>850	71
PEC A5	568x160x70	Tridonic	24	>1650	69
PEC B5	1128x160x70	Tridonic	24	>1750	73
PEC B5	1128x160x70	Tridonic	39	>3400	87

*Note: Subject to +/- 1.5mm

*Specification subject to change without prior notice.