




Description

Recessed mounted IP65 bottom opening luminaire.

Application

Mainly used for hospital, labs, clean room, commercial kitchen & etc.

Photometric

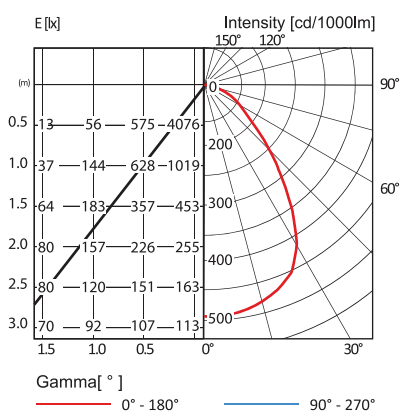


Electrical

Control Gear	Tridonic
Light Source	Linear LED Strip
Wattage	24W
Lumen Output	>2000lm
CRI	80
LER	83
CCT	4000K
SDCM	<4
L70	50,000hrs

Mechanical

Construction	Made of cold rolled steel
Diffuser	AA12 Acrylic

Dimension



PAC B5 CRF: W=335mm L=1295mm

Options

- Clear Acrylic Diffuser
- Dimming
- 3000K/6500K
- High output available

Ordering Data

MODEL NO.	Dimension (LxWxH)(mm)	Light Source Model	Nominal System Power (Watt)	Nominal System Lumen Output (lm)	Nominal System Efficacy (lm/W)
PAC B5 CRF					
Bottom Opener (1x4)	1324x362x118	Tridonic	24	>2000	83

*Note: Subject to +/- 1.5mm

*Specification subject to change without prior notice.