



PACIFIC

AURORAS LED

PAC Linear Eco Troffer Diffused Series




Description

Exposed T-bar recessed LED troffer.

Application

Office, retail and commercial.

Photometric

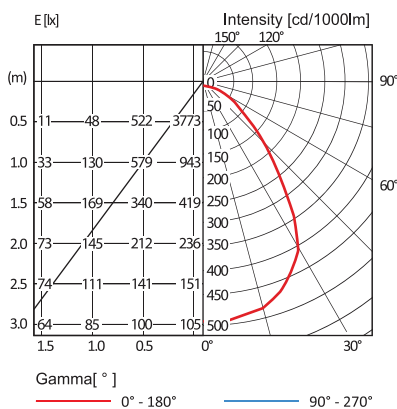

IES file No: SJ4136

Options

- Air Handling
- Air Return
- Dimming
- Surface kits
- 3000K / 6500K

Electrical


Control Gear Tridonic
Light Source Linear LED Strip

Wattage 20W
Lumen Output >1900lm
CRI 80
LER 95
CCT 4000K
SDCM <4
L70 50,000hrs

Mechanical

Construction Made of cold rolled steel
Diffuser AA12 Acrylic

Dimension



Ordering Data

MODEL NO.	Dimension (LxWxH)(mm)	Light Source Model	Nominal System Power (Watt)	Nominal System Lumen Output (lm)	Nominal System Efficacy (lm/W)
PAC A5 (1x2)	595x295x41	Tridonic	12	>1000	83
PAC A5 (1x2)	595x295x41	Tridonic	20	>1900	95
PAC B5 (1x4)	1195x295x41	Tridonic	24	>2000	83
PAC B5 (1x4)	1195x295x41	Tridonic	39	>3800	97

*Note: Subject to +/- 1.5mm

*Specification subject to change without prior notice.