




Description

Low glare LED louvred troffer.

Application

Offices, education and hospital.

Photometric

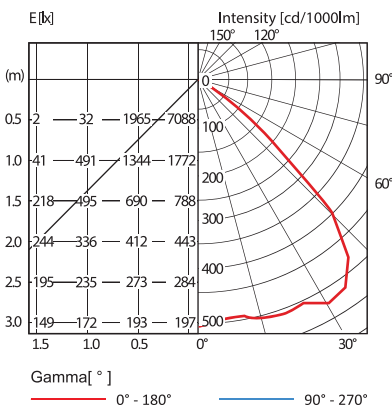

IES file No: SJ4209


Electrical

Control Gear	Tridonic
Light Source	Linear LED Strip
Wattage	39W
Lumen Output	>3650lm
CRI	80
LER	93
CCT	4000K
SDCM	<4
L70	50,000hrs

Mechanical

Construction	Made of cold rolled steel
U Tube/Louvre	High Quality Anodise Aluminium
Diffuser	AA12 Acrylic

Dimension



Options

- Air Handling
- Air Return
- Plaster Trim
- Surface Mount
- Cyanosis
- 3000K / 6500K
- Dimming
- Emergency
- Frosted U Shape Diffuser

Ordering Data

MODEL NO.	Dimension (LxWxH)(mm)	Light Source Model	Nominal System Power (Watt)	Nominal System Lumen Output (lm)	Nominal System Efficacy (lm/W)
PAC A5 VDU (1x2)	595x295x70	Tridonic	12	>940	78
PAC A5 VDU (1x2)	595x295x70	Tridonic	20	>1750	88
PAC B5 VDU (1x4)	1195x295x70	Tridonic	24	>1900	79
PAC B5 VDU (1x4)	1195x295x70	Tridonic	39	>3650	93

*Note: Subject to +/- 1.5mm

*Specification subject to change without prior notice.