




## Description

UGR 16 recessed T-bar LED louvre troffer.

## Application

Offices and education facilities.

## Photometric

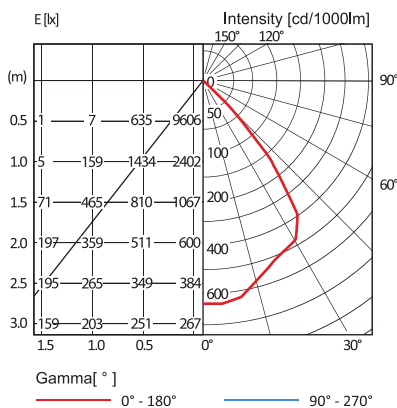

IES file No: SJ2519


## Electrical

<b>Control Gear</b>	Philips
<b>Light Source</b>	Linear LED Strip
<b>Wattage</b>	56W
<b>Lumen Output</b>	>3900lm
<b>CRI</b>	80
<b>LER</b>	70
<b>CCT</b>	4000K
<b>SDCM</b>	<4
<b>L70</b>	50,000hrs

## Mechanical

<b>Construction</b>	Made of cold rolled steel
<b>Louvre</b>	High Quality Anodised Aluminium
<b>Diffuser</b>	Frosted U Shape

## Dimension



## Ordering Data

MODEL NO.	Dimension (LxWxH)(mm)	Light Source Model	Nominal System Power (Watt)	Nominal System Lumen Output (lm)	Nominal System Efficacy (lm/W)
PAC D4 VDU PF (1x4)	1195x295x70	Philips	56	>3900	70

\*Note: Subject to +/- 1.5mm

\*Specification subject to change without prior notice.

## Options

- Dimming
- 3000K / 6500K
- Cyanosis