




## Description

IP65 heavy duty vandal resistant polycarbonate linear LED fixture. Complete with polycarbonate diffuser & stainless steel mounting clips.

## Photometric

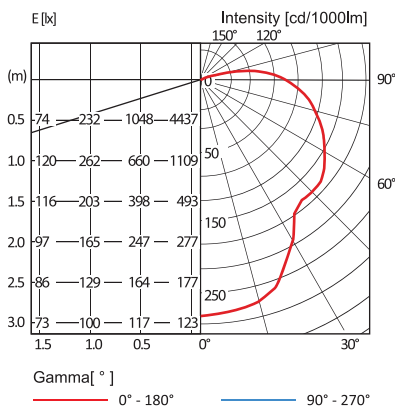

## Application

Carparks, under eaves, service areas and other industrial applications.


### Electrical

<b>Control Gear</b>	Tridonic
<b>Light Source</b>	Linear LED Strip
<b>Wattage</b>	39W
<b>Lumen Output</b>	>3800lm
<b>CRI</b>	80
<b>LER</b>	97
<b>CCT</b>	4000K
<b>SDCM</b>	<4
<b>L70</b>	50,000hrs

### Mechanical

<b>Construction</b>	Polycarbonate
<b>Diffuser</b>	Polycarbonate
<b>Secondary Diffuser</b>	Frosted U Shape

## Dimension



## Ordering Data

MODEL NO.	Dimension (LxWxH) (mm)	Light Source Model	Nominal System Power (W)	Nominal System Lumen Output (lm)	Nominal System Efficacy (lm/W)
PCR A5	660x85x87	Tridonic	12	>1000	83
PCR A5	660x85x87	Tridonic	20	>1900	95
PCR B5	660x134x87	Tridonic	24	>2100	88
PCR B5	660x134x87	Tridonic	39	>3800	97
PCR B5	1269x85x87	Tridonic	24	>2100	88
PCR B5	1269x85x87	Tridonic	39	>3800	97
PCR D5	1269x134x87	Tridonic	48	>4200	88
PCR D5	1269x134x87	Tridonic	78	>7700	99

## Options

- T8 LED Tube
- Emergency
- Shower Lights
- Pole Mount
- Dimming