




Description

Surface mounted LED linear narrow diffused batten.

Application

Suitable for commercial, industrial and domestic applications.

Photometric

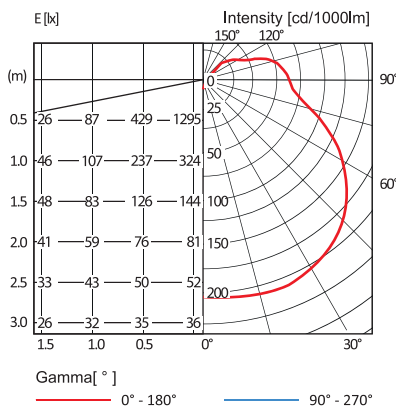

IES file No: SJ5153


Electrical

Control Gear	Tridonic
Light Source	Linear LED Strip
Wattage	24W
Lumen Output	>1600lm
CRI	80
LER	67
CCT	4000K
SDCM	<4
L70	50,000hrs

Mechanical

Construction	Made of cold rolled steel
Diffuser	Opal Acrylic

Dimension



Options

- Dimming
- 3000K / 6500K
- Acrylic Diffuser
- T8 LED Tube

Ordering Data

MODEL NO.	Dimension (LxWxH)(mm)	Light Source Model	Nominal System Power (W)	Nominal System Lumen Output (lm)	Nominal System Efficacy (lm/W)
PDBN A5	624x69x105	Tridonic	12	>800	67
PDBN A5	624x69x105	Tridonic	20	>1500	75
PDBN B5	1235x69x105	Tridonic	24	>1600	67
PDBN B5	1235x69x105	Tridonic	39	>3000	77

*Note: Subject to +/- 1.5mm

*Specification subject to change without prior notice.