




### Description

Rectangular aluminium continuous LED extrusion. Suitable for recess mounting. Direct distribution via ULB or linear prismatic diffuser.

### Application

Ideal for offices, education, commercial & hospital applications.

### Photometric

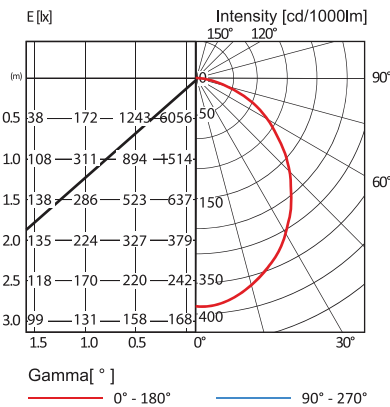

IES file No: SJ4396


### Electrical

<b>Control Gear</b>	Tridonic
<b>Light Source</b>	Linear LED Strip
<b>Wattage</b>	39W
<b>Lumen Output</b>	>3850lm
<b>CRI</b>	80
<b>LER</b>	99
<b>CCT</b>	4000K
<b>SDCM</b>	<4
<b>L70</b>	50,000hrs

### Mechanical

<b>Construction</b>	Extruded aluminium
<b>Diffuser</b>	LED Frosted

### Dimension



PEF A5 Recessed: W=89mm L=573mm  
PEF B5 Recessed: W=89mm L=1133mm

### Options

- Natural Anodized
- Epoxy Powder Coat
- Dimming
- Cyanosis
- Custom Fittings
- Emergency
- T5
- 3000K / 6500K

### Ordering Data

MODEL NO.	Dimension (LxWxH)(mm)	Light Source Model	Nominal System Power (W)	Nominal System Lumen Output (lm)	Nominal System Efficacy (lm/W)
PEF A5 Recessed	594x105x100	Tridonic	12	>1000	83
PEF A5 Recessed	594x105x100	Tridonic	24	>1900	79
PEF B5 Recessed	1154x105x100	Tridonic	24	>2000	83
PEF B5 Recessed	1154x105x100	Tridonic	39	>3850	99

\*Note: Subject to +/- 1.5mm

\*Specification subject to change without prior notice.