




Description

Low profile architectural designed LED surface mounted fixture. With smooth wrap around diffuser.

Application

Ideal for office, classroom and where visual comfort and ambience is required.

Photometric

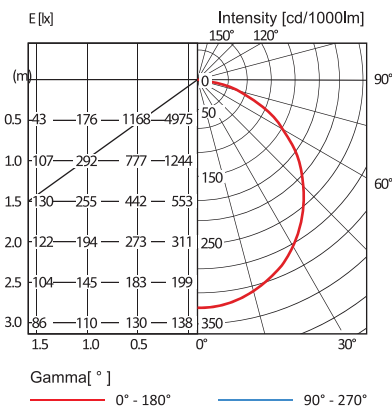

IES file No: SJ5152


Electrical

Control Gear	Tridonic
Light Source	Linear LED Strip
Wattage	44W
Lumen Output	>3700lm
CRI	80
LER	84
CCT	4000K
SDCM	<4
L70	50,000hrs

Mechanical

Construction	Made of cold rolled steel
Diffuser	Frosted Opal

Dimension



Options

- Dimming
- Emergency
- Cyanosis
- IP44
- 3000K/6500K

Ordering Data

MODEL NO.	Dimension (LxWxH)(mm)	Light Source Model	Nominal System Power (W)	Nominal System Lumen Output (lm)	Nominal System Efficacy (lm/W)
PGB B5	605x150x56	Tridonic	24	>1800	75
PGB B5	605x150x56	Tridonic	39	>3500	90
PGB D5	1176x150x56	Tridonic	44	>3700	84
PGB D5	1176x150x56	Tridonic	78	>7000	90

*Note: Subject to +/- 1.5mm

*Specification subject to change without prior notice.