




Description

Recessed airhandling LED troffer.

Application

Ideal for offices, retail stores, supermarkets, school and hotels.

Photometric

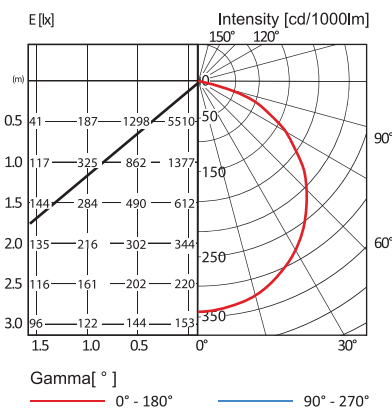

IES file No: SJ5162

Options

- Dimming
- 3000K / 6500K
- Cyanosis
- Emergency

Electrical

Control Gear	Tridonic
Light Source	Linear LED Strip
Wattage	39W
Lumen Output	>3950lm
CRI	80
LER	101
CCT	4000K
SDCM	<4
L70	50,000hrs

Mechanical

Construction	Made of cold rolled steel
Diffuser	Frosted Opal

Dimension



Ordering Data

MODEL NO.	Dimension (LxWxH)(mm)	Light Source Model	Nominal System Power (Watt)	Nominal System Lumen Output (lm)	Nominal System Efficacy (lm/W)
PLA A5 (1x2)	595x295x85	Tridonic	12	>1000	83
PLA A5 (1x2)	595x295x85	Tridonic	20	>1950	96
PLA B5 (1x4)	1195x295x85	Tridonic	24	>2050	85
PLA B5 (1x4)	1195x295x85	Tridonic	39	>3950	101
PLA B5 (2x2)	595x595x85	Tridonic	24	>2050	85
PLA B5 (2x2)	595x595x85	Tridonic	39	>3950	101

*Note: Subject to +/- 1.5mm

*Specification subject to change without prior notice.