




Description

Premium UGR 16 LED recessed louvre troffer.

Application

Office, education facilities, commercial and retail.

Photometric

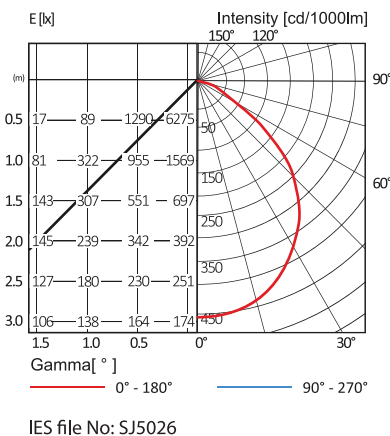

Electrical

| | |
|---------------------|------------------|
| Control Gear | Tridonic |
| Light Source | Linear LED Strip |
| Wattage | 45W |
| Lumen Output | >3400lm |
| CRI | 80 |
| LER | 75 |
| CCT | 4000K |
| SDCM | <4 |
| L70 | 50,000hrs |

Mechanical

| | |
|---------------------|---------------------------|
| Construction | Made of cold rolled steel |
| Louvre | White Paint Aluminium |
| Diffuser | LED Opal |

Dimension



Options

- Dimming
- 3000K / 6500K
- Cyanosis

Ordering Data



PLR D5 (2x2): W=573mm L=571mm
 PLR D5 (1x4): W=253mm L=1133mm

| MODEL NO. | Dimension (LxWxH)(mm) | Light Source Model | Nominal System Power (Watt) | Nominal System Lumen Output (lm) | Nominal System Efficacy (lm/W) |
|--------------|-----------------------|--------------------|-----------------------------|----------------------------------|--------------------------------|
| PLR D5 (2x2) | 597x597x98 | Tridonic | 45 | >3400 | 75 |
| PLR D5 (1x4) | 1197x297x104 | Tridonic | 45 | >3400 | 75 |

*Note: Subject to +/- 1.5mm

*Specification subject to change without prior notice.