




## Description

Linear surface / suspended LED highbay complete with acrylic diffuser.

## Application

Recreation facilities, industrial, and warehouse.

## Photometric

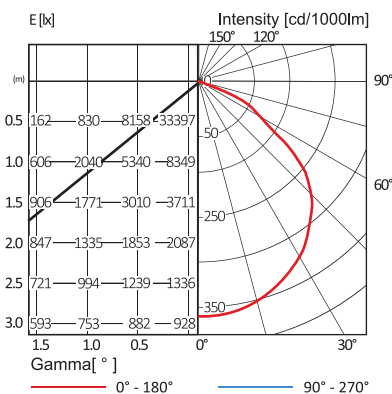

IES file No: SJ3822

## Options

- Dimming
- 3000K/6500K
- High Impact Lens
- Wire Guard


## Electrical

<b>Control Gear</b>	Philips
<b>Light Source</b>	Linear LED Strip
<b>Wattage</b>	180W
<b>Lumen Output</b>	>22500lm
<b>CRI</b>	80
<b>LER</b>	125
<b>CCT</b>	4000K
<b>SDCM</b>	<3
<b>L70</b>	50,000hrs

## Mechanical

<b>Construction</b>	Made of cold rolled steel
<b>Diffuser</b>	Clear Acrylic Diffuser
<b>Reflector</b>	White Paint Aluminium

## Dimension



## Ordering Data

MODEL NO.	Dimension (LxWxH) (mm)	Light Source Model	Nominal System Power (Watt)	Nominal System Lumen Output (lm)	Nominal System Efficacy (lm/W)
PLT D3 (1x4)	1176x182x71	Philips	117	>15000	128
PLT F3 (1x4)	1176x247x71	Philips	180	>22500	125

\*Note: Subject to +/- 1.5mm

\*Specification subject to change without prior notice.