




## Description

Surface mounted UGR <19 LED troffer.

## Application

Offices, education, retail and commercial.

## Photometric

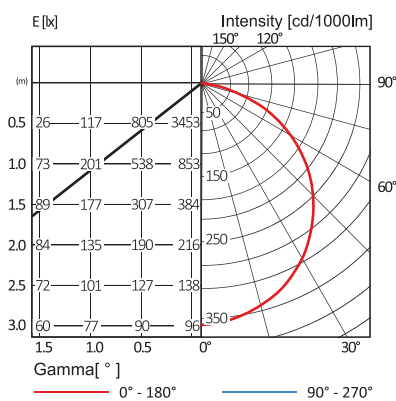

IES file No: SJ4593

## Electrical

<b>Control Gear</b>	Tridonic
<b>Light Source</b>	Linear LED Strip (Square)
<b>Wattage</b>	31W
<b>Lumen Output</b>	>2400lm
<b>CRI</b>	80
<b>LER</b>	77
<b>CCT</b>	4000K
<b>SDCM</b>	<3
<b>L70</b>	50,000hrs

## Mechanical

<b>Construction</b>	Made of cold rolled steel
<b>Diffuser</b>	LED Opal

## Dimension



## Options

- Dimming
- 3000K/5000K/6500K
- Cyanosis
- Emergency

## Ordering Data

MODEL NO.	Dimension (LxWxH)(mm)	Light Source Model	Nominal System Power (Watt)	Nominal System Lumen Output (lm)	Nominal System Efficacy (lm/W)
PSL B5 (2x2)	595x595x90	Tridonic	31	>2400	77
PSL B5 (1x4)	1195x295x90	Tridonic	31	>2400	77

\*Note: Subject to +/- 1.5mm

\*Specification subject to change without prior notice.