




Description

Surface mount LED troffer complete with prismatic diffuser.

Application

Suitable for office, retail, commercial, education and hospitals.

Photometric

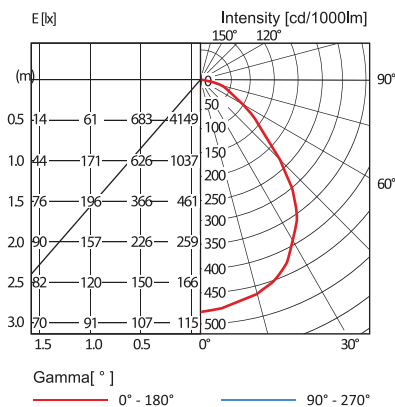


Electrical

Control Gear	Tridonic
Light Source	Linear LED Strip
Wattage	24W
Lumen Output	>2150lm
CRI	80
LER	90
CCT	4000K
SDCM	<4
L70	50,000hrs

Mechanical

Construction	Made of cold rolled steel
Diffuser	AA12 Acrylic

Dimension



Options

- 3000K / 6500K
- Cyanosis
- Dimming

Ordering Data

MODEL NO.	Dimension (LxWxH)(mm)	Light Source Model	Nominal System Power (W)	Nominal System Lumen Output (lm)	Nominal System Efficacy (lm/W)
PTBT B5/S (2x2)	595x595x70	Tridonic	12	>1150	96
PTBT B5/S (2x2)	595x595x70	Tridonic	20	>2150	108
PTBT B5/S (1x4)	1195x295x70	Tridonic	24	>2150	90
PTBT B5/S (1x4)	1195x295x70	Tridonic	39	>4300	110
PTBT D5/S (1x4)	1195x295x70	Tridonic	48	>4600	96
PTBT D5/S (1x4)	1195x295x70	Tridonic	78	>8650	111

*Note: Subject to +/- 1.5mm

*Specification subject to change without prior notice.