

SL 408




Description

Surface mounted low profile LED lowbay.

Application

Ideal for petrol station, bus station, train stations, drive-through restaurants, convenience stores, parking garages and industrial lighting applications.

Photometric

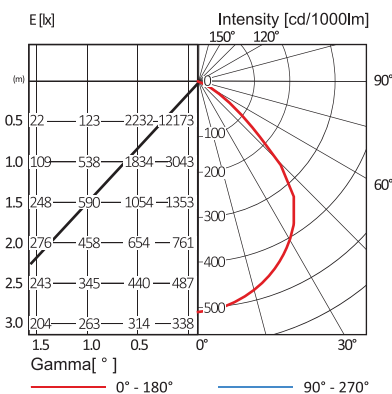

IES file No: SJ3767

Options

- 4000K
- Dimming


Electrical

Control Gear	Osram
Light Source	Osram PrevaLED Sky-LP / HP
Wattage	60W
Lumen Output	>6000lm
CRI	70
LER	100
CCT	6500K
SDCM	<5
L70	50,000hrs

Mechanical

Construction Made of cold rolled steel

Dimension

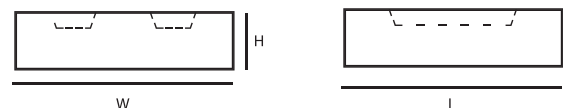

Ordering Data

MODEL NO.	Dimension (LxWxH)(mm)	Nominal System Power (W)	Nominal System Lumen Output (lm)	Nominal System Efficacy (lm/W)
SL 408.1	445x215x95	30	>3000	100
SL 408.1	445x215x95	60	>6000	100
SL 401.2	365x365x95	60	>6000	100
SL 401.2	365x365x95	120	>12000	100

*Note: Subject to +/- 1.5mm

*Specification subject to change without prior notice.