



SL 402.4




Description

Surface mounted LED lowbay.

Application

Ideal for petrol station, bus station, train stations, drive-through restaurants, convenience stores, parking garages and industrial lighting applications.

Photometric

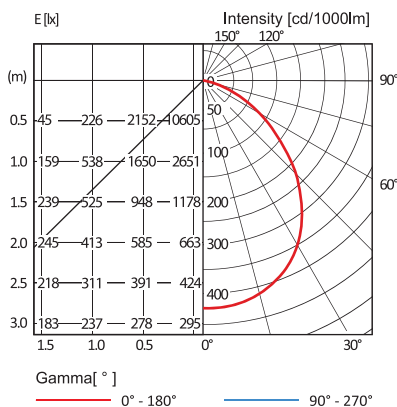

Options

- 4000K
- Recess
- Dimming


Electrical

Control Gear	Osram
Light Source	Osram PrevaLED SKY-LP
Wattage	60W
Lumen Output	>6000lm
CRI	70
LER	100
CCT	6500K
SDCM	<5
L70	50,000hrs

Mechanical

Construction Made of cold rolled steel

Dimension



Ordering Data

MODEL NO.	Dimension (LxWxH) (mm)	Light Source Model	Nominal System Power (W)	Nominal System Lumen Output (lm)	Nominal System Efficacy (lm/W)
SL 402.2	365x365x62	Osram	60	>6000	100
SL 402.4	595x595x62	Osram	120	>12000	100

*Note: Subject to +/- 1.5mm

*Specification subject to change without prior notice.